





CAN-LAMBDA Quick Start Guide

WIRING DIAGRAM

Preferred

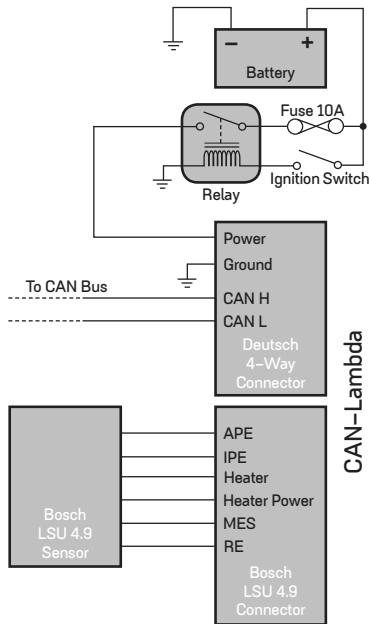

Alternative

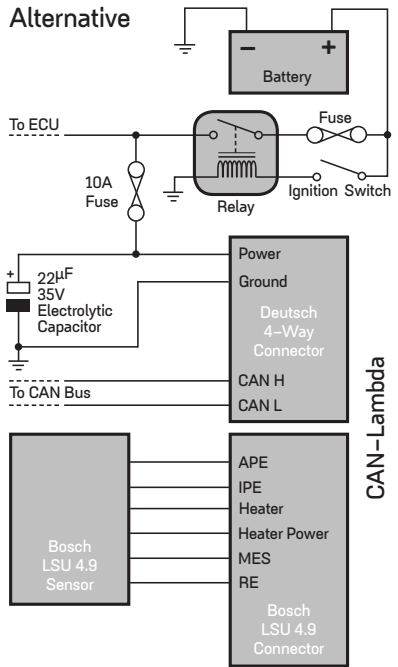

This CAN-Lambda controller is preconfigured to a bit rate of 1Mbit/s, the default CAN ID is 950. Other supported bit rates are: 125 kbit/s, 250 kbit/s and 500 kbit/s.

See www.linkecu.com/can-lambda/ for the full CAN-Lambda guide.

CONNECTOR INFORMATION

Deutsch 4-Way


Power and Communications Connector

Pin	Description	Wire Size (min)
1	Power	0.85 - 1.00mm
2	GND	0.85 - 1.00mm
3	CAN L	0.3 - 0.35mm
4	CAN H	0.3 - 0.35mm


Bosch LSU 4.9 Sensor

Pin	Description
1	APE
2	IPE
3	Heater
4	Heater Power
5	MES
6	RE

Bosch LSU4.9 Sensor Diagram

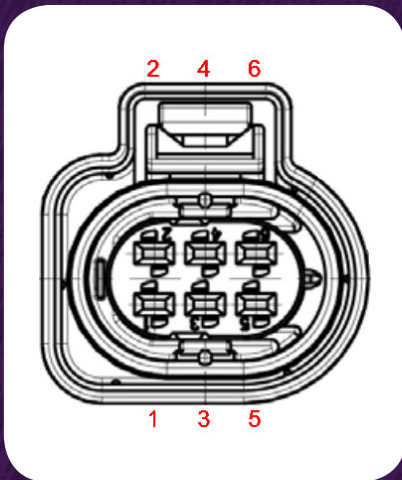

Deutsch 4-Way Connector Diagram

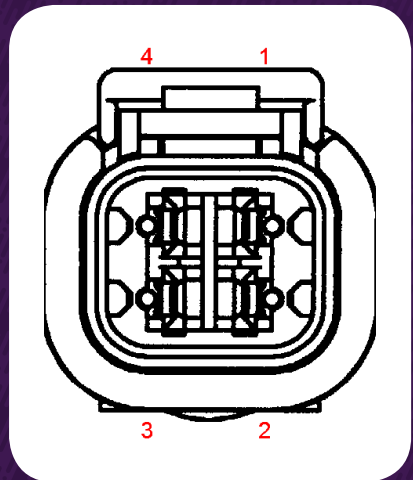

Looking into the connectors attached to the controller